




Blades for Hand-held saws / Ring saws

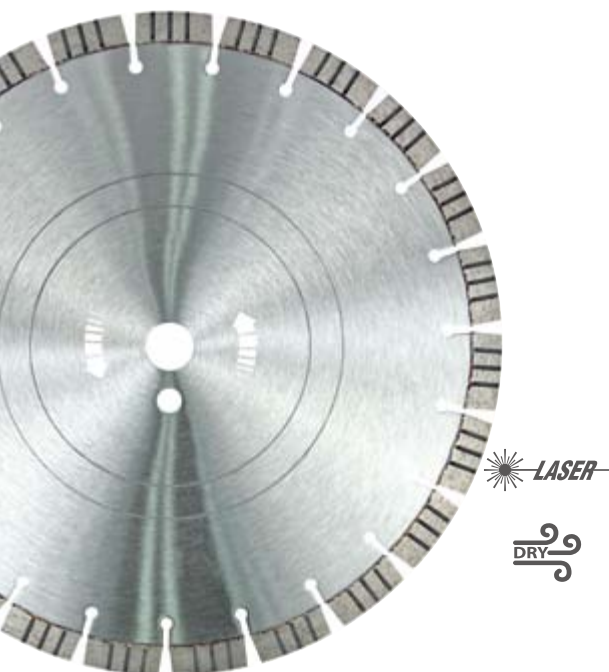

Laser welded

Diameter	Length	Thickness	Height	Reference	Max. operating speed
12"(300)	40	2.8	10 / 12	Specification of Ring saw 33Length- 4.2Thickness- 8 / 10Height	100 m/s
14"(350)		3.2			
16"(400)		3.2			
18"(450)		3.6			

* Other sizes are available upon request.

* Cooling hole and silent body are available upon request.



Material	Grade	Supreme	Premium	Standard	Economy	Super economy	Premium hard material	Standard abrasive material
Product name		Zensis	Select one from the blade types above					Normal
Product code		UUZHD	UPLHD	USLHD	UELHD	UOLHD	HPLHD	ASLHD
Steel / Rail track		★★★	★★	★			★★	
Ductile iron / Cast iron		★★★	★★	★			★★	
Reinforced concrete		★★★★★	★★★★★	★★	★		★★★★★	★
Washed concrete		★★★★★	★★★★★	★★	★		★★★★★	★
Refractory brick		★★★★★	★★★★★	★★	★		★★★★★	★
Clinker		★★★★★	★★★★★	★★★	★★		★★★★★	★★
Roof tile		★★★★★	★★★★★	★★★	★★	★	★★★★★	★★
Granite / Porphyry / Basalt / Quarzite / Hard stone		★★★★★	★★★★★	★★★	★★		★★★★★	★★
Cured concrete / Concrete pipe		★★★★★	★★★★★	★★★	★★	★	★★★★★	★★
Concrete block / Brick		★★★★★	★★★★★	★★	★	★	★★★★★	★★★
Marble		★★★	★★	★	★		★★	★★
Sandstone / Limestone		★★★	★★	★	★		★★	★★★
Motar		★★★★★	★★★★★	★★	★★	★	★★★★★	★★★
Asphalt / Green concrete		★★★	★★	★	★		★★	★★★



Brazed single layer (BSL)

Diameter	Thickness	Max. operating speed
12"(302)	3.1 / 3.4	100 m/s
14"(352)		
16"(409)		



Material	Grade	Premium BSL
Product name		Rescue
Product code		UPBSD
Cast iron / Ductile iron / Steel / PVC pipe		★★★★★
HDPE / Wood / Copper / Fiber board		★★★
Masonry / Concrete / Brick / Stone		★★