



PCBN INSERTS STOCK TABLE

Hardened steel > HRC 50


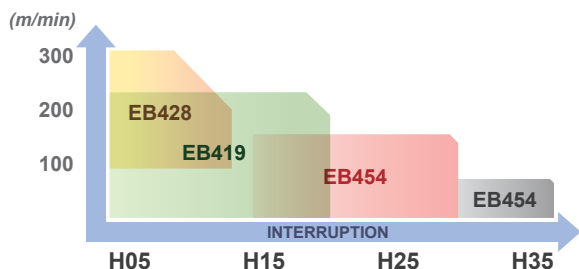


Cast Iron (grey iron, ductile iron)

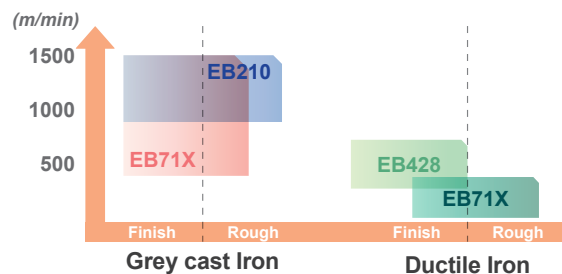


Continuous EB428

EB428 has good wear resistance at high temperature. It's suitable for continuous cutting of heat-treated steel and spherical graphite cast iron at high speed. TNP coated EB428 has excellent heat resistance.

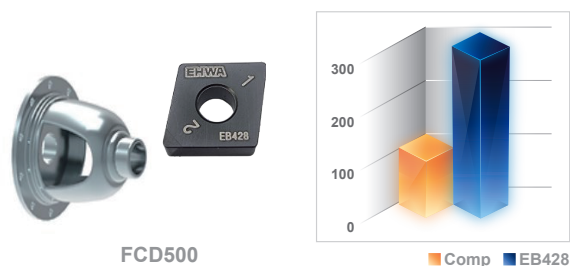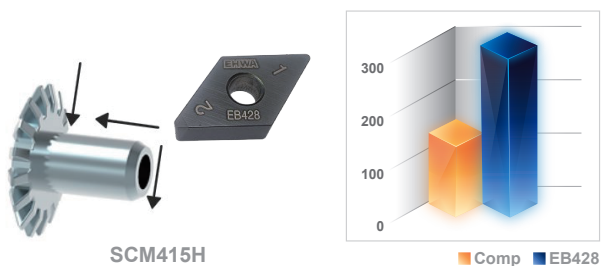


Continuous – Medium Interrupted EB419

EB419 is commonly used for continuous cutting of intermediate heat-treated steel and has excellent wear resistance. TNP coated EB419 has excellent heat resistance.

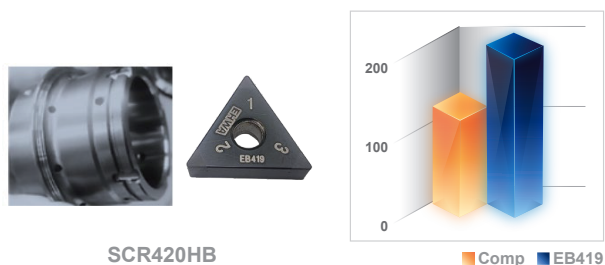


Light – Heavy interrupted EB454

EB454 is used for heat-treated steel from intermediate speed to high speed. TNP coated EB454 has excellent heat resistance edge sharpness.

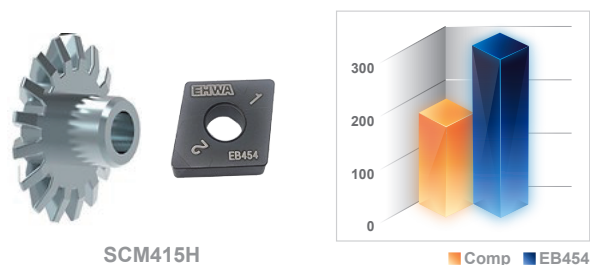


Heavy Interrupted EB210

EB210 is suitable for heavy interrupted cutting of high hardness cast iron at high speed thanks to its outstanding impact resistance and wear resistance.

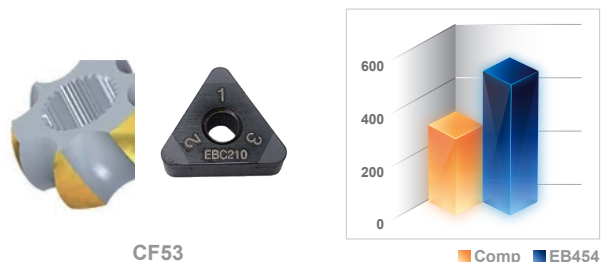

High contents EB71X

EB71X is suitable for cast iron machining.

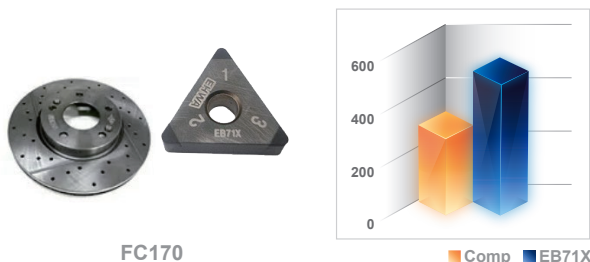

EHWA DIAMOND IND. CO. LTD.

374, Nambudae-ro, Osan-city, Gyeonggi-Do, 18145, Korea.

<http://www.ehwadia.com> / e-mail: bkkim@ehwadia.co.kr / Tel : +82-(31) 370-9220 / Fax : +82-(31) 370-9840

